

100

Linear and modern design for diffused decorative lighting. Suitable for many applications, it may be placed on furniture industry, stairs, wardrobe and under kitchen cupboards.

Aluminum body



Lifetime LED group >30.000 hrs

Operating temperature $-20^{\circ}\div+50^{\circ}\text{C}$

IP20 protection

Weight: 60/120/240 g

	Codice Code	Colore Color	N. LED	Flusso luminoso Luminous flux	Assorbimento P. consumption	Lunghezza Lenght	Alimentazione Power supply	Angolo di emissione Beam angle
EKOS A	8000051000	Bianco caldo / Warm white	27	100 lm	1,8W	25 cm	12V DC	120°
	8000051001	Bianco freddo / Cool white		130 lm	1,9W			
	8000051004	Rosso / Red		1,9W				
	8000051002	Verde / Green		1,8W				
	8000051003	Blu / Blue	1,8W	24V DC				
	8000051005	RGB	36		3,5W			
	8000051006	Bianco caldo / Warm white	54		200 lm	3,6W	12V DC	120°
	8000051007	Bianco freddo / Cool white			260 lm	3,8W		
	8000051010	Rosso / Red		3,8W				
	8000051008	Verde / Green		3,6W				
	8000051009	Blu / Blue	3,6W	24V DC				
	8000051211	RGB	72		5W			
	8000051012	Bianco caldo / Warm white	108	400 lm	7,2W	100 cm	12V DC	120°
	8000051013	Bianco freddo / Cool white		520 lm	7,6W			
	8000051016	Rosso / Red		7,6W				
	8000051014	Verde / Green		7,2W				
8000051015	Blu / Blue	7,2W	24V DC					
8000051217	RGB	144		10W				

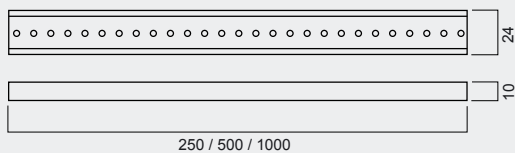

-  Bianco caldo/*Warm white* (2800+3200K)
-  Bianco freddo/*Cool white* (6000+6500K)
-  Rosso/*Red*
-  Verde/*Green*
-  Blu/*Blue*
-  RGB



Barra a LED

Rigid LED bar

12V DC

24V DC



Membro del consorzio ECOLIGHT - RAEE IT8020000001378 - Con riserva di modifiche S.E.&O. / Subject to change E.&O.E.

06-2011-VER 3.0

