

PRAXIS

Plafoniera a LED da incasso a controsoffitto, per l'installazione di design a sospensione o a plafoniera.
LED panel for recessed ceiling installation, suspension design alternative or ceiling lamp.

Durata gruppo ottico >50.000 ore

Temperatura operativa -20°+50°C

Indice di resa cromatica RA>75

Alimentatore incluso nella fornitura

PF >0,9

Protezione IP40

Peso 4,5 Kg

*Disponibile versione con *Step-Dimming*
 (l'intensità luminosa diminuisce ad ogni click dell'interruttore)

Lifetime LED group >50.000 hrs

Operating temperature -20°+50°C

Colorimetric index RA>75

LED driver included

PF >0,9




IP40 Protection

Weight 4,5 Kg

**Available with light level switching (Step-Dimming)*
 (The intensity decreases at every click)

Codice Code	Assorbimento Power consumption	Dimensioni Dimensions	Alimentazione Power supply	Colore Color	Flusso luminoso Luminous flux	Angolo di emissione Beam angle
8000021005	25W	60 x 60 cm	230V AC	Bianco neutro/Neutral white	2000 lm	120°
8000021015	45W*				2950 lm	
8000021030	25W	120 x 30 cm	230V AC	Bianco neutro/Neutral white	2050 lm	120°
8000021035	60W				4000 lm	

Bianco caldo e RGB su richiesta. / Warm white and RGB on request.

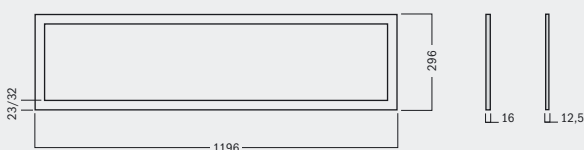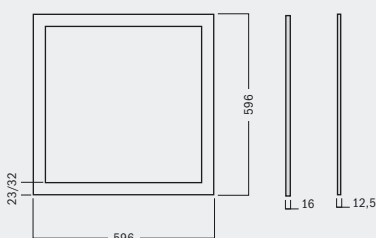

- Bianco caldo/Warm white (2800+3200K)
- Bianco neutro/Neutral white (4000+4500K)
- RGB

Versione con plafoniera / Ceiling lamp version.



Membro del consorzio ECOLIGHT - RAEE IT8020000001378 - Con riserva di modifiche S.E.&O. / Subject to change E.&O.E.



Praxis



45/60W



25W



Plafoniera
Ceiling light
230V AC



Sgaravatti Plant S.r.l.
via Panà, 56/B
35027 Noventa Padovana (PD) - Italia
www.sgaravattiplant.it - info@sgaravattiplant.it