



## ATLAS PE

Corpo da incasso, ideale per illuminare pensiline autostradali e stazioni di servizio.

*Recessed smart light, suitable for motorway and gas shelter lighting.*

Contenitore in alluminio

Vetro temprato 5 mm

Durata minima gruppo LED > 70.000 ore

Flusso luminoso 1900 lm (Tj=70°C; Ta=25°C) ±5%

30 LED @ 350 mA c.c.

Potenza assorbita 43W

Indice Resa Cromatica RA>75

PF > 0,9

Protezione IP55

Temperatura di funzionamento -25°+50°C

Peso 4,8 Kg

Disponibile anche in Classe 2

Aluminum housing

Tempered glass 5 mm

Lifetime LED group > 70.000 hrs

Luminous flux 1900 lm (Tj=70°C; Ta=25°C) ±5%

30 LED @ 350 mA c.c.

Power consumption 43W

Colorimetric index RA>75

PF > 0,9

Protection IP55


Operating temperature -25°+50°C

Weight 4,8 Kg


Also available in Class 2

Codice Code	N. LED	Ottica Optics	Assorbimento P. consumption	Alimentazione Power supply	Fascio luminoso Beam	Flusso luminoso Luminous flux	Angolo di emissione Beam angle
5000087050	30	Inclinata/Tilted	43W	230V AC	Symmetric	1900 lm	long. -35°+35° tra. -18°+18°

Altri modelli su richiesta. / Other models on request.

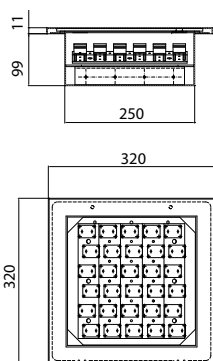

30 LED		
H	E	Area
5,2 m	140 Lux	8,5 x 4 m
7 m	80 Lux	10 x 4,5 m
8 m	60 Lux	11,5 x 5 m



5000÷6000K



Con riserva di modifiche. Salvo errori e omissioni. / Subject to change. Errors and omissions excepted.






ATLAS PE

CORPO ILLUMINANTE PER PENSILINE / *CANOPY LIGHT*

230V AC



Sgaravatti Plant S.r.l.  
via Panà, 56/B  
35027 Noventa Padovana (PD) - Italia  
[www.sgaravattiplant.it](http://www.sgaravattiplant.it) - [info@sgaravattiplant.it](mailto:info@sgaravattiplant.it)